

# PROXXON

*Tools  
with character!*



*New products 2026*



**1/2"**  
12.5 mm

**MicroClick Torque wrench MC 200/Quickshift**  
**Switches through all preset values in one turn..**



ISO  
**+/-3%**  
6789-1

Practical release mechanism: the socket is securely fixed and automatically released at the push of the button.

Sturdy, oval steel shaft with rust-protective finish: double nickel and subsequent matt-finished chrome-plating.

*The new QuickShift mechanism allows for the preset torque values to be set in less than one turn.*

**90 – 110 – 130 – 170 – 200**  
Nm      Nm      Nm      Nm      Nm

Laser-marked preset torque values as well as serial number for easy product identification.

Ergonomically shaped handle allows for automatically gripping it in a centric position. Important for obtaining an exact release torque.

Clearly legible analogue display.

With 1/2" square drive (12.5mm). For 90 – 110 – 130 – 170 – 200Nm. Automatic quick release: clearly audible and palpable click signal when selected torque is reached. Precision tools with high accuracy (tolerance of +/- 3% according to ISO 6789-1). Calibrated and inspected piece by piece. Including certificate of conformity. Total length 515mm. Packaged in a sturdy and practical plastic storage box.

**NO 23 335**



*Calibrated and inspected piece by piece.  
Including certificate of conformity.*

**3/4"**  
19 mm

**MicroClick Torque wrench MC 1000. For 200 – 1000Nm.**

**DIN**  
**ISO**



**ISO**  
**+/-3%**  
6789-1

*For trucks, construction and agricultural machinery, industrial and plant engineering, energy and infrastructure.*

With 3/4" square drive (19mm). Ratchet mechanism with reversing lever for clockwise and counter-clockwise rotation. Sturdy steel shaft with rust-protective finish: double nickel and subsequent matt-finished chrome-plating. Laser-marked serial number for easy product identification.

Automatic quick release: clearly audible and palpable click signal when selected torque is reached. Clearly legible analogue display with additional micro-scale for fine adjustment. Piece by piece calibration and final inspection. Including certificate of conformity.

Total length 1330mm.

**NO 23 339**

Clearly legible analogue display for simple pre-selection of the desired torque.

Ergonomically shaped handle allows for automatically gripping it in a centric position. Important for obtaining an exact release torque.

Additional micro-scale for fine adjustment.

Simple pre-setting of the torque by turning the knurled ring at the end of the handle, fixing it by sliding it into position.



*MicroClick torque wrenches are precision tools. They are packaged in a sturdy and practical plastic storage box*

*FLEX-DOT screwdrivers.*  
*The all-rounders for workshop and assembly.*

*Compact bit set with Mini FLEX-DOT handle .*  
*In functional zipper case. 26-piece.*

-  **PH:** 0 – 1 – 1 – 2 – 2 – 3
-  **PZ:** 1 – 1 – 2 – 2
-  **FD:** 3 – 5.5
-  **HX:** 1.5 – 2 – 2.5 – 3 – 4 – 5
-  **TX:** 6 – 8 – 10 – 15 – 20 – 25 – 30

25 bits of the most important shapes. In a practical folding holder for easy access to the bits. Includes the Mini-FLEX-DOT handle with magnetic holder. With permanently clear mark-ings of all bits.

**NO 22 730**



*Mini-Flex-Dot-Handle*

Extremely compact: total length only 90 mm. With magnetised bit holder.

**NO 22 285**



*Screwdriver with 1/4" magnetised bit holder and spring sleeve*



For standard 1/4" hex bits with magnet and with spring sleeve. Grip 110mm. Shaft 70mm. Total length 180mm.

**NO 22 284**

*Forged from CrV steel in one single piece.  
With perfect tothing.*

*SlimLine Ratchets 1/4" and 1/2". With extremely flat head and shaft.*

**SlimLine Ratchet 1/4"**

**NO 23 175**



10 mm


**SlimLine Ratchet 1/2"**

**NO 23 195**



15 mm

90  
DIN  
ISO  
CrV

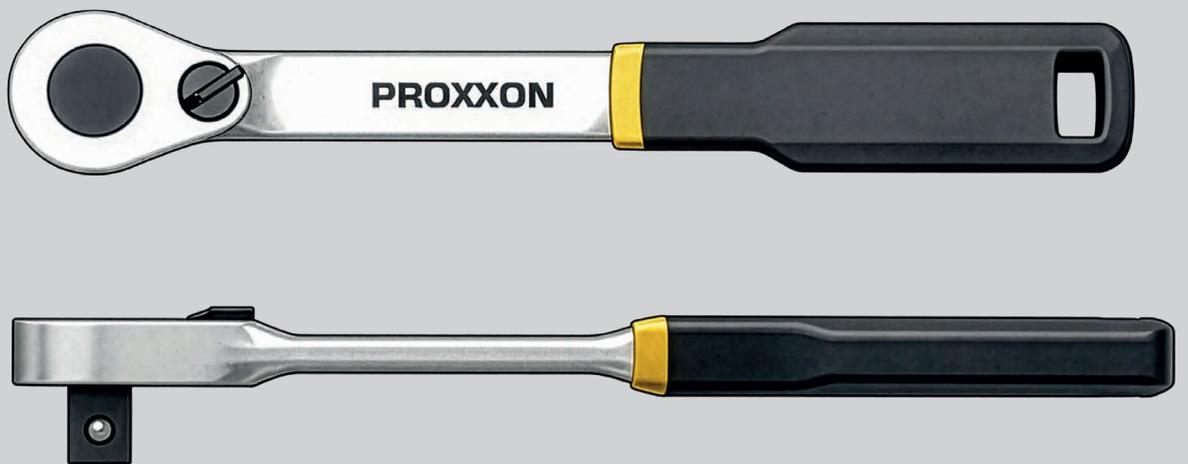

Fine tothing: Several of the 90 teeth engage simultaneously for transferring extremely high torque. Allows working where space is tight. Reverse lever for clockwise and counter-clockwise rotation.

Forged from CrV-steel, double nickel plated with matt chrome plated finish. Grip of oil- and acid-resistant TPR (Thermoplastic Rubber) with practical hanging hole.

**NO 23 175**                      1/4"

**NO 23 195**                      1/2"

*For holding, bending, cutting and much more.  
In the workshop and on the go.*

*Precision mechanics pliers. Five pieces for precision engineering  
and electronics.*



Precisely ground and hardened. Spring-loaded plier shanks with plastic-coated handles.

In a functional zipper case.

**NO 28 150**



PROXXON GmbH  
Industriepark Region Trier  
Dieselstraße 3 - 7  
DE-54343 Föhren  
Telefon +49 (0) 65 02 - 93 17 - 0 • Telefax +49 (0) 65 02 - 93 17 - 200  
E-Mail: [export@proxxon.com](mailto:export@proxxon.com) • [www.proxxon.com](http://www.proxxon.com)